

HASLER

Installation Instructions

WJ185, WJ220, WJ250

Introduction

The **United States Postal Service** has announced a rate change effective January 8, 2006. The Rate Card provided with these instructions will update your Hasler WJ meters to the most current rates.



January 2006

**Follow the instruction on the back of this notice
to install the new rates in your scale.**

If You Have Questions

Call your local Hasler dealer or contact us:

Hasler, ®Inc.
19 Forest Parkway
Shelton, CT 06484-6140

Phone 800-446-6027


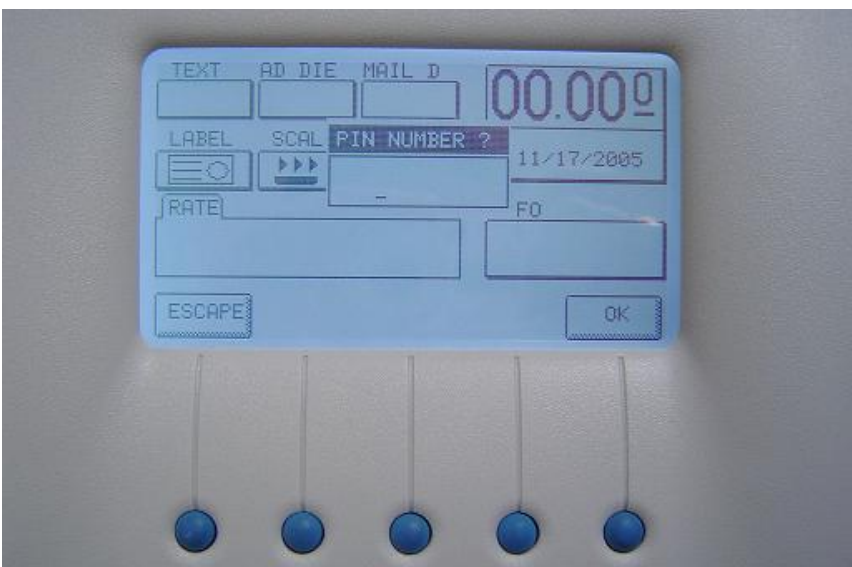
Fax 800-631-0546

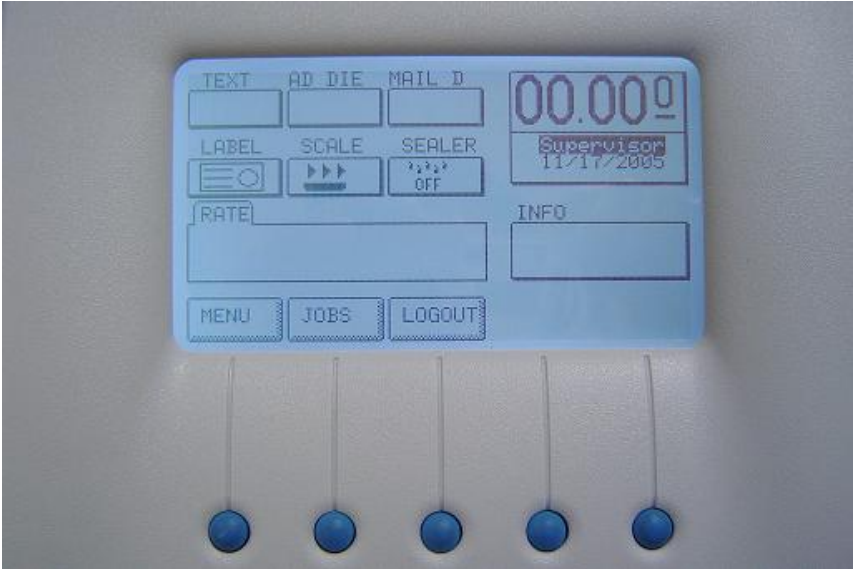

Rate Change Highlights

The USPS will institute a 5.4% increase on Domestic and International rates. Here is a brief description of the rates affected by the increase.

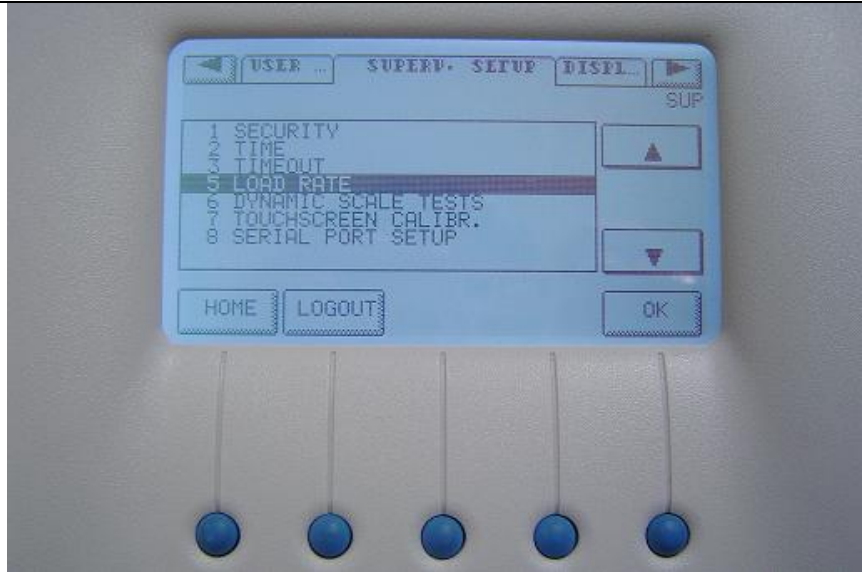
First Class	First ounce, up 2 cents from \$.37 to \$.39. Each additional ounce, up 1 cent to \$.24.
Priority Mail	Base rate up 20 cents to \$4.05. One pound up 30 cents to \$6.15.
Express Mail	8 ounces, up 75 cents to \$14.40.
Parcel Post	2 pounds, up 22 cents to \$4.36.
Post Card	Up 1 cent to 24 cents.
Certified Mail	Up 10 cents to \$2.40.

Installation Procedure

Step	Action	Figure
1	<p>From the metering screen (shown)</p> <p>Press LOGIN to enter Supervisor mode.</p>	 <p>The image shows a blue control panel with a monochrome LCD screen. The screen displays several fields: 'TEXT', 'AD DIE', and 'MAIL D' at the top; '00.000' in a large digital display on the right; '11/17/2005' below the display; 'LABEL', 'SCALE', and 'SEALER' in the middle; 'RATE' and 'INFO' in larger input boxes below; and 'MENU', 'JOBS', and 'LOGIN' at the bottom. The 'LOGIN' button is highlighted with a white border. Below the panel are five blue push-buttons connected by thin wires.</p>
2	<p>Enter the Supervisor Pin number (9430).</p> <p>Press OK.</p>	 <p>The image shows the same blue control panel as in Figure 1. The screen now displays 'PIN NUMBER ?' in the 'SCALE' field. The 'OK' button at the bottom right is highlighted with a white border. The 'LOGIN' button is no longer highlighted. The rest of the screen layout remains the same as in Figure 1.</p>


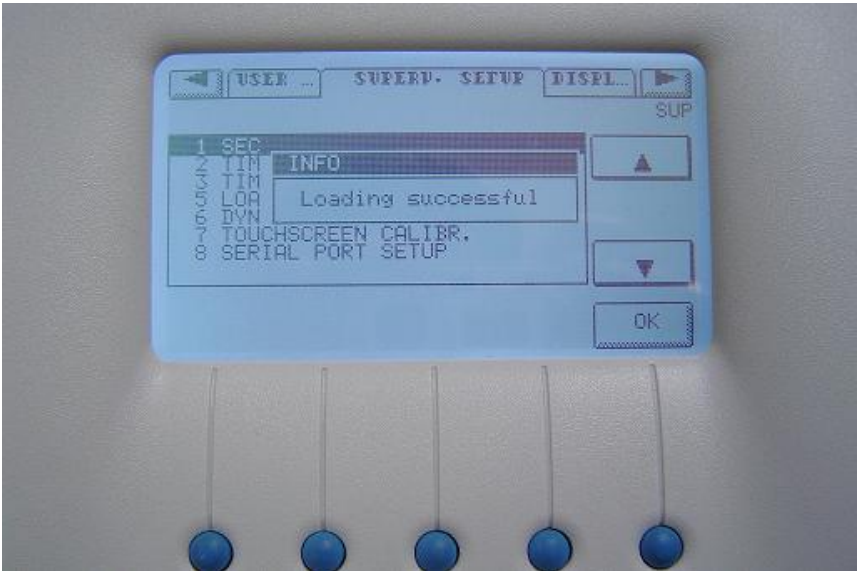
<p>3</p>	<p>Now you will be in the Supervisor main screen (shown).</p> <p>Press MENU.</p>	 <p>The image shows the Supervisor main screen of a device. The screen is light blue and displays several fields: 'TEXT', 'AD DIE', 'MAIL D', '00.00', 'Supervisor', and '11/17/2005'. Below these are buttons for 'LABEL', 'SCALE', 'SEALER', 'RATE', and 'INFO'. At the bottom are 'MENU', 'JOBS', and 'LOGOUT' buttons. Five blue buttons are visible below the screen.</p>
<p>4</p>	<p>Now you will be in the MENUS sub-menu.</p> <p>Scroll down (using the up & down arrows) to SUPERV, SETUP.</p> <p>Press OK.</p>	 <p>The image shows the MENUS sub-menu. The screen displays a list of options: '0 USER SETUP', '1 SUPERV. SETUP', '2 DISPLAY SETUP', '3 POSTAL SERVICES', '4 DEPARTMENTS', '5 PRINTING INKER SERVICING', and '6 REPORTS'. The '1 SUPERV. SETUP' option is highlighted. There are up and down arrow buttons on the right side of the screen. At the bottom are 'HOME', 'LOGOUT', 'CLEAN', and 'OK' buttons. Five blue buttons are visible below the screen.</p>
<p>5</p>	<p>Now you will be in the SUPERV, SETUP sub-menu.</p>	<p>Next Page</p>


Scroll down (using the up & down arrows) to **LOAD RATE**.



Make sure to insert the rate card (with the chip facing up) before pressing OK.



<p>6</p>	<p>Make sure the rate card is inserted properly, or you will get the error message: "E102 Waiting for memory card, Insert and retry".</p>	
<p>7</p>	<p>Once the rate has been downloaded you will see the message: "Loading Successful" (shown). Press OK.</p>	
		<p>Next Page</p>

<p>8</p>	<p>A message will display informing you that the rates will be overwritten when you press OK.</p> <p>Press OK.</p>	
<p>9</p>	<p>The rates have now been successfully updated.</p> <p>Press the LOGOUT button to return to User mode.</p>	